应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

Item 项次	P/N 料号	Dim (L/W/H) 尺寸(mm)	HGT 合高(mm)	Voltage 电压	Current 电流	PW Pair 电源组	Signal Pin 信号	Style 封装	Press fit 适用压接	Page 页码
【迷你刀片大电流系列 | Mini blade Power Conn 】										
1	PDC0710B0001	16.3*21.7*6.0	22.0	100V	35A	2Pairs	4pins	Wire-harness 焊线式	NA	1
2	PDC0810B0001	14.7*20.1*6.0						R/A DIP折弯插板式		1
3	PDC5310C0001	35.4*7.5*21.9	28.9	250V	60A	2Pairs	4pins	Straight DIP直立插板式	NA	1
4	PDC5410C0001	35.4*8.8*17.5								1
【微型板对板大电流系列 | Mini B-to-B Power conn 】										
5	PDC1310B0001	25.4*5.2*7.1	10.0	60V	50A	2Pairs	4pins	Straight DIP直立插板式	NA	2
6	PDC1210B0001	25.4*5.2*7.4								2
7	PDC1010B0005	20.2*5.0*6.5	9.1	50V	40A	2Pairs	NA		NA	2
8	PDC1110B0005	21.0*5.6*7.6								2
【超迷你卡式大电流 | Ultra Mini Edge Card Slot 】										
9	PBC0210B0001	24.5*7.0*9.0	NA	50V	40A	2Pairs	10pins	Straight SMT直立贴片式	NA	3
10	PBC0220B0001	24.5*7.0*9.0								3
【EN20A刀片式大电流系列 | EN20A blade Hi-Current Power conn 】										
11	PDC1510B0001	35.0*9.3*8.0	10.1	50V	120A	12Pins	Flexible set 自由设定	Straight DIP直立插板式	NA	4
12	PDC1610B0011	39.4*12.2*6.9				12Pairs				4
13	PDC1530B0001	50.3*9.3*8.0				12Pins				4
14	PDC1620B0011	50.3*12.2*6.9				12Pairs				4
15	PDC5510C0001	40.2*14.0*10.4	21.2	125V	20A/Pin	4Pins	12Pins	R/A DIP折弯插板式		5
16	PDC5610C0001	40.2*12*11.6			20A/Pair	4Pairs	12Pairs			5
17	PDC5710C0001	51.0*14.0*10.4	21.2	125V	20A/Pin	4Pins	24Pins			5
18	PDC5810C0001	51.0*12*11.6			20A/Pair	4Pairs	24Pairs			5
19	PDC5910C0001	51.0*14.0*10.4	21.2	125V	20A/Pin	8Pins	12Pins			6
20	PDC6010C0001	51.0*12*11.6			20A/Pair	8Pairs	12Pairs			6
21	PDC6110C0001	61.8*14.0*10.4	21.2	125V	20A/Pin	8Pins	24Pins			6
22	PDC6210C0001	61.8*12*11.6			20A/Pair	8Pairs	24Pairs			6
23	PDC6310C0001	56.4*14.0*10.4	21.2	125V	20A/Pin	12Pins	6Pins			7
24	PDC6410C0001	56.4*12*11.6			20A/Pair	12Pairs	6Pairs			7
25	PDC6510C0001	61.8*14.0*10.4	21.2	125V	20A/Pin	12Pins	12Pins			7
26	PDC6610C0001	61.8*12*11.6			20A/Pair	12Pairs	12Pairs			7
27	PDC6710C0001	51.0*14.0*10.4	21.2	125V	20A/Pin	12Pins	Flexible set 自由设定			8
28	PDC6810C0001	51.0*12*11.6			20A/Pair	12Pairs				8
29	PDC6910C0001	56.4*14.0*10.4	21.2	125V	20A/Pin	14Pins				8
30	PDC7010C0001	56.4*12*11.6			20A/Pair	14Pairs				8
31	PDC7110C0001	61.8*14.0*10.4	21.2	125V	20A/Pin	16Pins				9
32	PDC7210C0001	61.8*12*11.6			20A/Pair	16Pairs				9

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

Item 项次	P/N 料号	Dim (L/W/H) 尺寸(mm)	Voltage 电压	Current 电流	PW Pair 电源组	Signal Pin 信号	Style 封装	Press fit 适用压接	Page 页码
【EN60A刀片式大电流系列 | EN60A blade Hi-Current Power conn 】									
33	PDC0110F0002	47.1*29.5*10.0	250V	60A/Per PW 3A/Per Signal Pin	4Pairs	6Pins	R/A DIP折弯插板式	NA	10
34	PDC0120F0001	47.1*13.9*21.9					Straight DIP直立插板式	Yes	10
35	PDC0210F0001	47.1*18.0*14.4						Yes	10
36	PDC0110F0003	47.1*29.5*10.0					R/A DIP折弯插板式	NA	11
37	PDC0220F0001	48.1*25.0*14.0				6+2Pins		NA	10
38	PDC0120F0002	47.1*13.9*21.9				6Pins	Straight DIP直立插板式	Yes	11
39	PDC0120F0003	47.1*13.9*21.9						Yes	11
40	PDC1720F0001	66.5*13.9*21.9			6Pairs	12Pins		Yes	12
41	PDC1810F0002	66.5*18.0*14.4						Yes	12
42	PDC1820F0001	67.5*25.0*14.0				12+2Pins	R/A DIP折弯插板式	NA	12
43	PDC1710F0003	66.5*29.5*10.0				12Pins		NA	12
44	PDC1720F0002	66.5*13.9*21.9					Straight DIP直立插板式	Yes	13
45	PDC1720F0003	66.5*13.9*21.9						Yes	13
46	PDC1920F0001	73.1*13.9*21.9			8Pairs	6Pins	Straight DIP直立插板式	Yes	13
47	PDC2010F0001	73.1*18.0*14.4						Yes	13
48	PDC1920F0002	73.1*13.9*21.9						Yes	14
49	PDC1920F0003	73.1*13.9*21.9						Yes	14
50	PDC2210F0001	88.5*18.0*14.4			10pairs	12Pins		Yes	14
51	PDC2110F0001	88.5*13.9*21.9						Yes	15
52	PDC2120F0002	88.5*13.9*21.9						Yes	15
53	PDC2120F0003	88.5*13.9*21.9						Yes	15
54	PDC2110F0003	88.5*29.2*10.0					R/A DIP折弯插板式	NA	15
55	PDC2220F0001	89.5*25.0*14.0				12+2Pins		NA	16
56	PDC2510F0003	66.5*29.5*10.0			7pairs	6Pins		NA	16
57	PDC2610F0001	66.5*18.0*14.4					Straight DIP直立插板式	Yes	16
58	PDC2810F0001	77.5*18.0*14.4			8Pairs	12Pins		Yes	16
59	PDC2710F0001	77.5*13.9*21.9						Yes	17
60	PDC2710F0003	77.5*29.2*10.0					R/A DIP折弯插板式	NA	17
61	PDC2720F0002	77.5*13.9*21.9					Straight DIP直立插板式	Yes	17
62	PDC2720F0003	77.5*13.9*21.9						Yes	17
63	PDC2910F0001	83.5*13.9*21.9			12Pairs	Flexible setting		Yes	18
64	PDC3010F0001	83.5*18.0*14.4						Yes	18
65	PDC2910F0003	83.5*29.2*10.0					R/A DIP折弯插板式	NA	18
66	PDC2920F0002	83.5*13.9*21.9					Straight DIP直立插板式	Yes	18
67	PDC2920F0003	83.5*13.9*21.9						Yes	19

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

Item 项次	P/N 料号	Dim (L/W/H) 尺寸(mm)	Voltage 电压	Current 电流	PW Pair 电源组	Signal Pin 信号	Style 封装	Press fit 适用压接	Page 页码
【EN60A刀片式大电流系列 | EN60A blade Hi-Current Power conn 】									
68	PDC2420F0001	45.5*25.0*14.0	250V	60A/Per PW 3A/Per Signal Pin	2	12+2	R/A DIP 折弯插板式	NA	11
69	PDC2310F0003	44.5*25.0*14.0							14
70	PDC2820F0001	78.5*25.0*14.0			8	12+2			19
71	PDC3020F0001	84.5*25.0*14.0			12	2			19
72	PDC7312F3403	55.1*29.2*10.0			4	12+2			21
73	PDC7420F0001	56.1**25.014.0							21
74	PDC0520F0002	55.5*13.9*21.9				12	Straight DIP 直立插板式	Yes	20
75	PDC0520F0003	55.5*13.9*21.9							20
76	PDC0610F0001	55.5*18.0*13.9							20
77	PDC0520F0001	55.5*13.9*21.9							20
78	PDC7322F3402	55.1*13.9*21.9				12+2			21
79	PDC7410F0001	55.1*18.0*14.4							21
【EX150刀片式大电流系列 | EX150 blade Hi-Current Power conn 】									
80	PDC3320F0001	70.3*20.0*20.5	600V	150A/Per PW 7.5A/Per Signal Pin	4Pairs	24Pins	Straight DIP直立插板式	Yes	22
81	PDC3410F0001	76.9*27.0*21.0							23
82	PDC3330F0001	70.3*20.0*20.5			4Pairs	12Pins			23
83	PDC3410F0002	76.9*27.0*21.0							23
84	PDC3720F0001	88.1*20.0*20.5			6Pairs	24Pins			23
85	PDC3810F0001	94.7*27.0*21.0							22
86	PDC3730F0001	88.1*20.0*20.5			6Pairs	12Pins			22
87	PDC3810F0002	94.7*27.0*21.0							22
【AT80针式大电流系列 | AT80 Needle Hi-Current Power Conn 】									
88	PAT0110BT001	37.0*23.2*14.0	200V	80A	2Pair		Wire-harness焊线式	NA	25
89	PAT02X0BT001	34.1*25.6*17.5							25
【AW40机臂电连接器模组 | Arm quick fit Connector Module 】									
90	PAW0910C0002	Ø33.6/Ø43.0/L43.4	250V	15A/Pos	7Pos	Flexible setting	Wire-harness焊线式	NA	24
91	PAW1010C0002	Ø25.6/Ø40.0/L43.4		15A/Pin	7Pin				24
92	PAW1110C0001	Ø46.6/Ø56/L57		35A/Pos	8Pos				24
93	PAW1210C0001	Ø37.8/Ø53.5/L60.2		35A/Pin	8Pin				24
【Other | busbar Style 滑轨式汇流条/Magnetic connector 磁吸式连接器】									
94	PBC03-111	33.5*17.5*14.8	150V	70A	/	/	Straight DIP直立插板式	NA	3
95	PBC04-111	33.5*12.5*9.5			/	/		NA	3
96	PGC701JB00R1	39.0*11*11.4	60V	3A/Pin	20Pins	Flexible	R/A DIP折弯插板式	NA	9
97	PGF701JB00V1	49.0*6.3*11.0					Straight DIP直立插板式	NA	9

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

首页 Home

迷你大电流公头2电源4信号.焊线式 | Mini Power Male. 2P4S. Wire-Harness type


Patented product 专利产品

PDC0710B0001



电压Voltage rating	100VDC/max
电流Current rating	35A/Per power Pin.
接触电阻Contact resistance	1.0mΩ max.
耐久Durability life	2,000 cycles .
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Motor

Compatible P/N:
PDC0810B0001

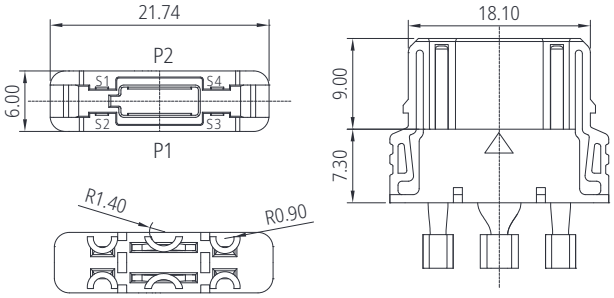

迷你大电流母座2电源4信号.折弯插板式 | Mini Power Female. 2P4S. R/A type


Patented product 专利产品

PDC0810B0001



电压Voltage rating	100VDC/max
电流Current rating	35A/Per power Pin.
接触电阻Contact resistance	1.0mΩ max.
耐久Durability life	2,000 cycles.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Motor

Compatible P/N:
PDC0710B0001

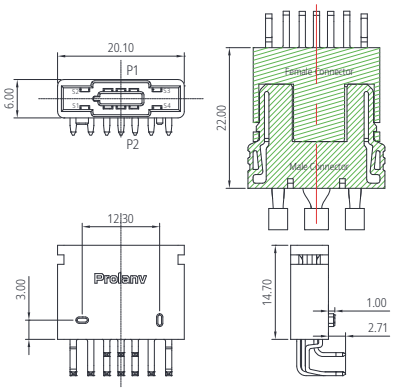

大电流公头2电源4信号.直立插板式 | Hi-Current Power Male. 2P4S. Straight type


Optional | Not detrimental Spark & Pre-water proof spec.

PDC5310C0001



电压Voltage rating	250VDC/max
电流Current rating	60A/Per power Pin.
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Motor

Compatible P/N:
PDC5410C0001

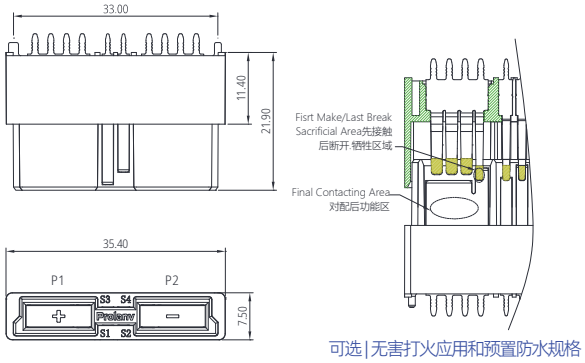

可选|无害打火应用和预置防水规格

大电流母座2电源4信号.直立插板式 | Hi-Current Power Female. 2P4S. Straight type


Optional | Not detrimental Spark & Pre-water proof spec.

PDC5410C0001



电压Voltage rating	250VDC/max
电流Current rating	60A/Per power Pin.
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Motor

Compatible P/N:
PDC5310C0001

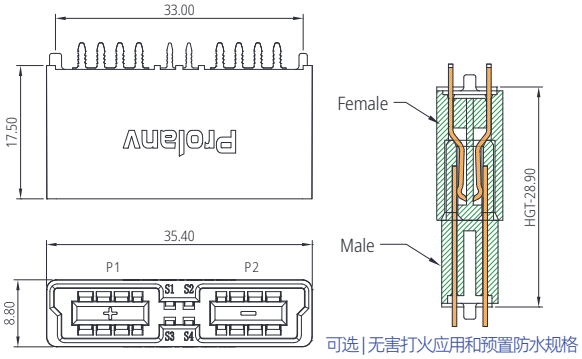

可选|无害打火应用和预置防水规格


Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

首页 Home


迷你大电流公座2电源4信号50A.直立插板式 | Mini Power Male. 2P4S. Straight type

PDC1310B0001



电压Voltage rating	60VDC/max
电流Current rating	50A /Per Power Pair
接触电阻Contact resistance	0.5mΩ max (initial).
耐久Durability life	2,000 cycles.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Motor

Compatible P/N:
PDC1210B0001

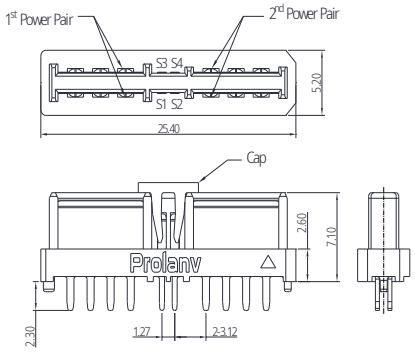


迷你大电流母座2电源4信号50A.直立插板式 | Mini Power Female. 2P4S. Straight type

PDC1210B0001



电压Voltage rating	60VDC/max
电流Current rating	50A /Per Power Pair
接触电阻Contact resistance	0.5mΩ max (initial).
耐久Durability life	2,000 cycles.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Motor

Compatible P/N:
PDC1310B0001

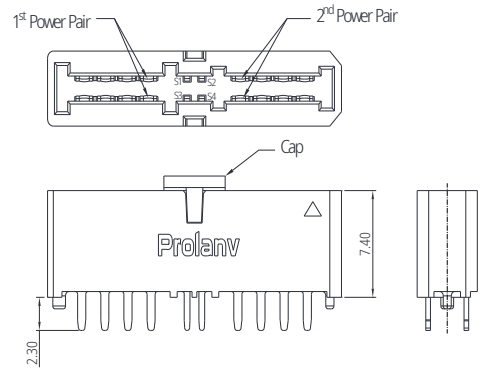

迷你大电流母座2电源 40A.直立插板式 | Mini Power Female. 2PW. Straight type


Patented product 专利产品

PDC1010B0005



电压Voltage rating	50VDC/max
电流Current rating	40A /Per Power Pin
接触电阻Contact resistance	0.5mΩ max. Initial
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-35°c~105°c.
应用领域 Application Field	Drone/Robot/Motor

Compatible P/N:
PDC1110B0005

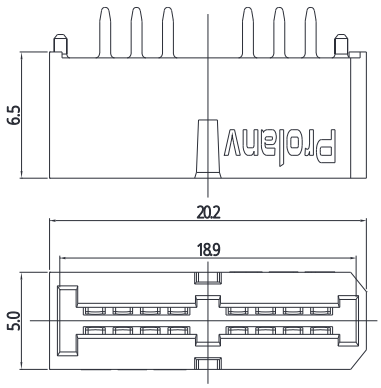

迷你大电流公座2电源 40A.直立插板式 | Mini Power Male. 2PW. Straight type


Patented product 专利产品

PDC1110B0005



电压Voltage rating	50VDC/max
电流Current rating	40A /Per Power Pin
接触电阻Contact resistance	1.0mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-35°c~105°c.
应用领域 Application Field	Drone/Robot/Motor

Compatible P/N:
PDC1010B0005

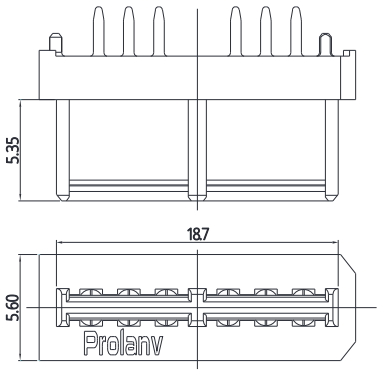

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

首页 Home

超迷你型卡式大电流2组电源10信号.直立贴片式 | Ultra Mini Edge Card Slot.


Patented product 专利产品

PBC0210B0001



电压Voltage rating	50VDC/max
电流Current rating	40A/per power pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	2000 cycles min.
工作温度Temperature range	-35°c~120°c.
应用领域 Application Field	IE Device

Compatible
Module Card

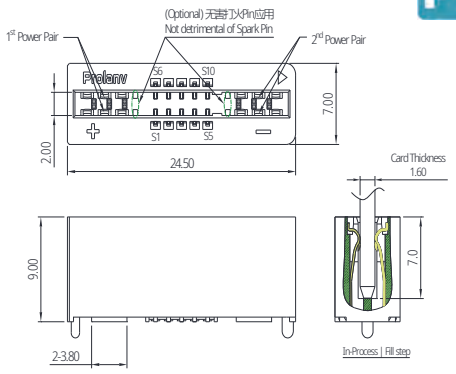

超迷你型卡式大电流2组电源10信号.直立贴片式 | Ultra Mini Edge Card Slot.


Patented product 专利产品

PBC0220B0001



电压Voltage rating	50VDC/max
电流Current rating	40A/per power pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	2000 cycles min.
工作温度Temperature range	-35°c~120°c.
应用领域 Application Field	IE Device

Compatible
Module Card

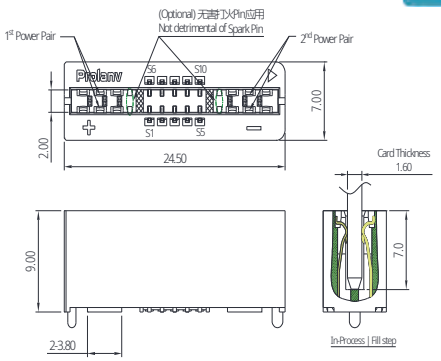


Busbar style M-Terminal 滑轨式/汇流条公端

PBC03-111




电压Voltage rating	150VDC/max
电流Current rating	70A max./Per pin
接触电阻Contact resistance	0.6mΩ max. Initial
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~150°c.
应用领域 Application Field	Drone/Robot/IE device...

Compatible P/N:
PBC04-111

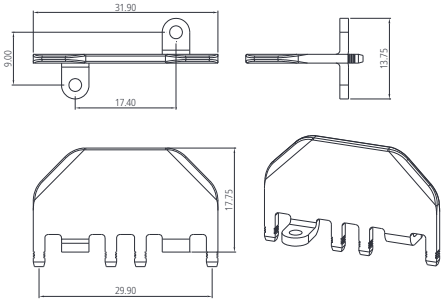


Busbar style F-Terminal 滑轨式/汇流条母端

PBC04-111



电压Voltage rating	150VDC/max
电流Current rating	70A max./Per pin
接触电阻Contact resistance	0.6mΩ max. Initial
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~150°c.
应用领域 Application Field	Drone/Robot/IE device...

Compatible P/N:
PBC03-111

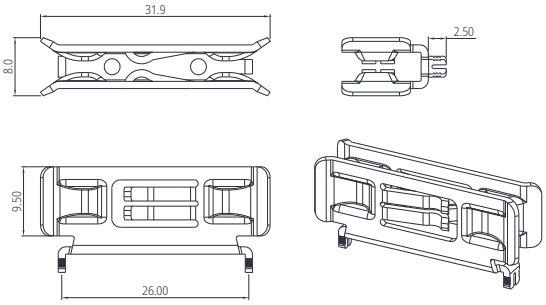

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

首页 Home


微型刀片大电流公座12PW.直立插板式 | Mini blade Power Male. 12PW. Straight type

PDC1510B0001



电压Voltage rating	50VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	2,000 cycles.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot

Compatible P/N:
PDC1610B0011

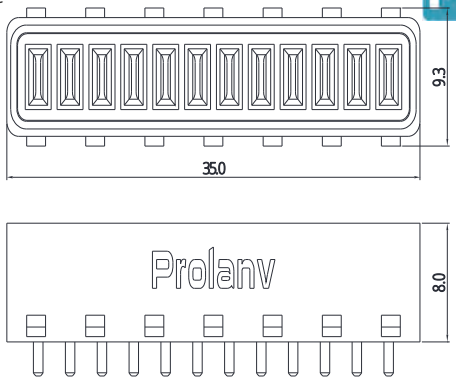


微型刀片大电流母座12PW.直立插板式 | Mini blade Power Female. 12PW. Straight type

PDC1610B0011



电压Voltage rating	50VDC/max
电流Current rating	20A /Per Pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	2,000 cycles.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot

Compatible P/N:
PDC1510B0001

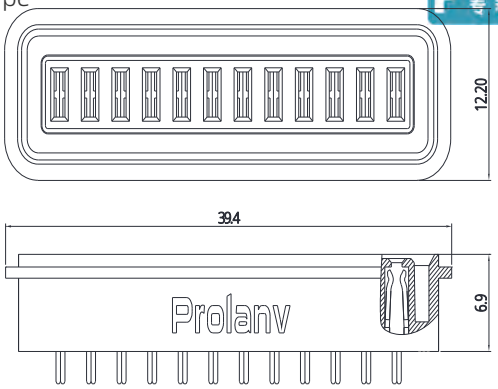


微型刀片大电流公座12PW.有耳直立插板式 | Mini blade Power Male. 12PW, Straight type

PDC1530B0001



电压Voltage rating	50VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	2,000 cycles.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot

Compatible P/N:
PDC1620B0011

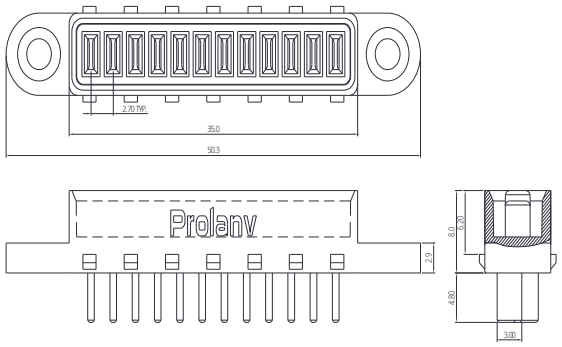


微型刀片大电流母座12PW.有耳直立插板式 | Mini blade Power Female. 12PW. Straight type

PDC1620B0011



电压Voltage rating	50VDC/max
电流Current rating	20A /Per Pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	2,000 cycles.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot

Compatible P/N:
PDC1530B0001

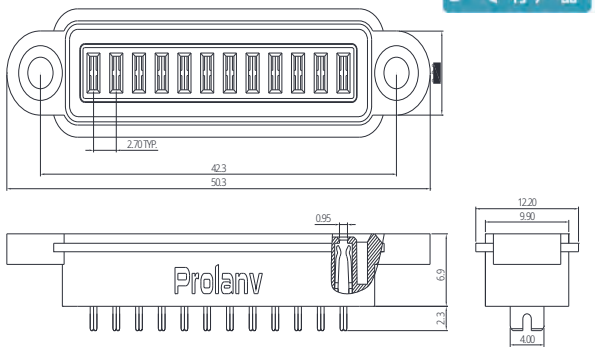

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

首页 Home


EN20A刀片大电流公座 blade Power Male 4PW+12S. R/A DIP折弯插板式

PDC5510C0001



电压Voltage rating	125VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~125°c.
防水等级 Waterproof level	≧IPX6 in the mated

Compatible P/N:
PDC5610C0001

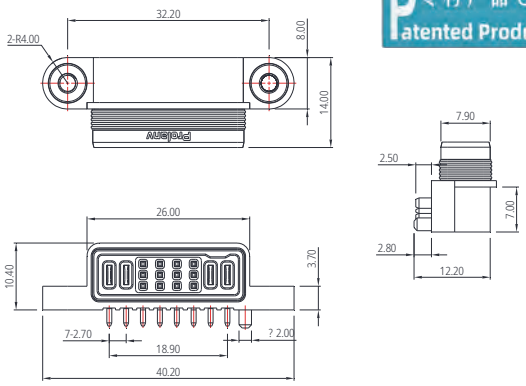

专利产品 Patented Product


EN20A刀片大电流母座 blade Power Male 4PW+12S. R/A DIP折弯插板式

PDC5610C0001



电压Voltage rating	125VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~125°c.
防水等级 Waterproof level	≧IPX6 in the mated

Compatible P/N:
PDC5510C0001

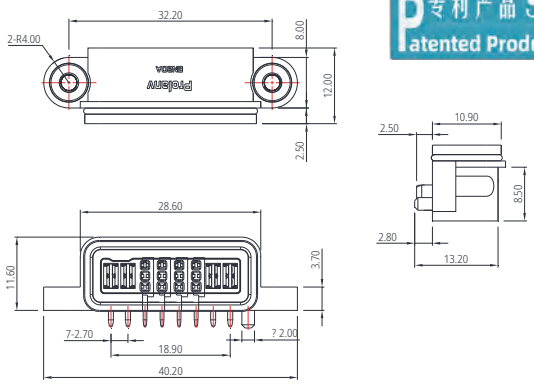

专利产品 Patented Product


EN20A刀片大电流公座 blade Power Male 4PW+24S. R/A DIP折弯插板式

PDC5710C0001



电压Voltage rating	125VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~125°c.
防水等级 Waterproof level	≧IPX6 in the mated

Compatible P/N:
PDC5810C0001

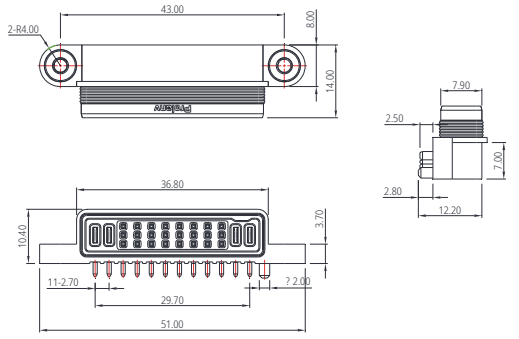

专利产品 Patented Product


EN20A刀片大电流母座 blade Power Male 4PW+24S. R/A DIP折弯插板式

PDC5810C0001



电压Voltage rating	125VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~125°c.
防水等级 Waterproof level	≧IPX6 in the mated

Compatible P/N:
PDC5710C0001

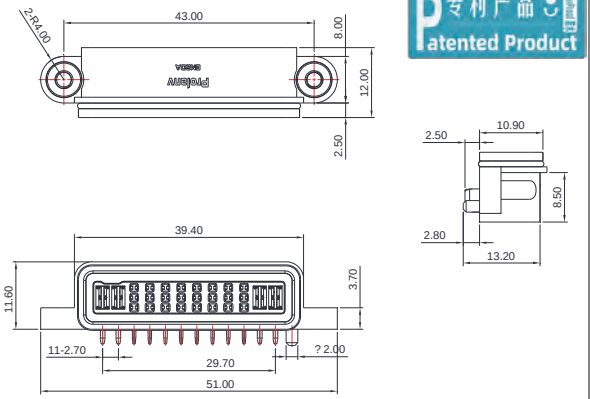

专利产品 Patented Product

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

首页 Home


EN20A刀片大电流公座 blade Power Male 8PW+12S. R/A DIP折弯插板式

PDC5910C0001



电压Voltage rating	125VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~125°c.
防水等级 Waterproof level	≧IPX6 in the mated

Compatible P/N:
PDC6010C0001

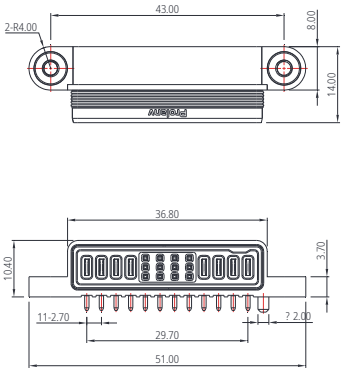

专利产品 Patented Product


EN20A刀片大电流母座 blade Power Male 8PW+12S. R/A DIP折弯插板式

PDC6010C0001



电压Voltage rating	125VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~125°c.
防水等级 Waterproof level	≧IPX6 in the mated

Compatible P/N:
PDC5910C0001

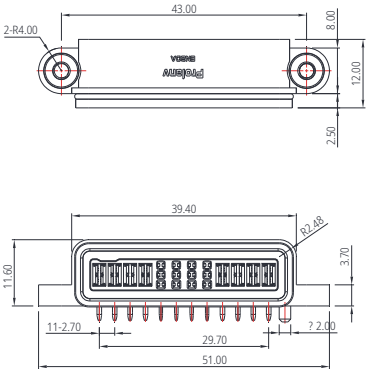

专利产品 Patented Product


EN20A刀片大电流公座 blade Power Male 8PW+24S. R/A DIP折弯插板式

PDC6110C0001



电压Voltage rating	125VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~125°c.
防水等级 Waterproof level	≧IPX6 in the mated

Compatible P/N:
PDC6210C0001

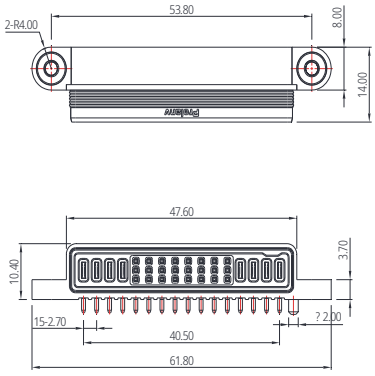

专利产品 Patented Product


EN20A刀片大电流母座 blade Power Male 8PW+24S. R/A DIP折弯插板式

PDC6210C0001



电压Voltage rating	125VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~125°c.
防水等级 Waterproof level	≧IPX6 in the mated

Compatible P/N:
PDC6110C0001

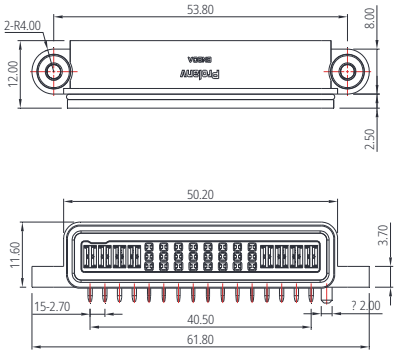

专利产品 Patented Product

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

首页 Home


EN20A刀片大电流公座 blade Power Male 12PW+6S. R/A DIP折弯插板式

PDC6310C0001



电压Voltage rating	125VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~125°c.
防水等级 Waterproof level	≧IPX6 in the mated

Compatible P/N:
PDC6410C0001

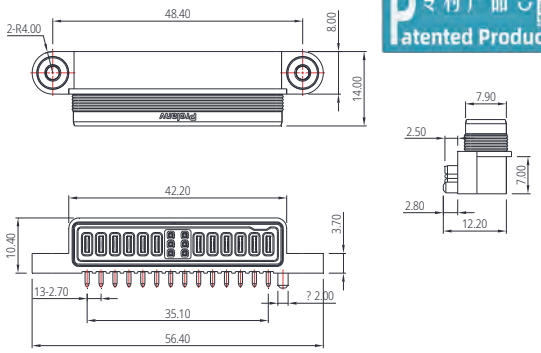

专利产品 Patented Product


EN20A刀片大电流母座 blade Power Male 12PW+6S. R/A DIP折弯插板式

PDC6410C0001



电压Voltage rating	125VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~125°c.
防水等级 Waterproof level	≧IPX6 in the mated

Compatible P/N:
PDC6310C0001

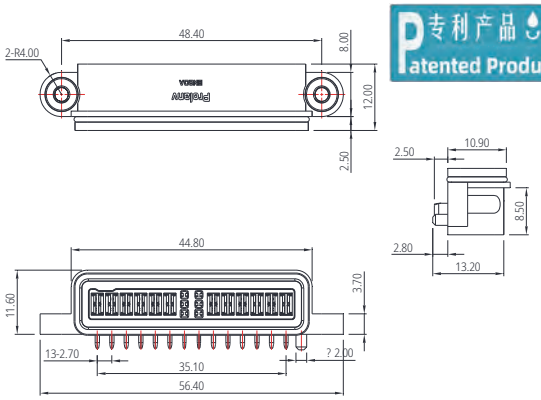

专利产品 Patented Product


EN20A刀片大电流公座 blade Power Male 12PW+12S. R/A DIP折弯插板式

PDC6510C0001



电压Voltage rating	125VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~125°c.
防水等级 Waterproof level	≧IPX6 in the mated

Compatible P/N:
PDC6610C0001

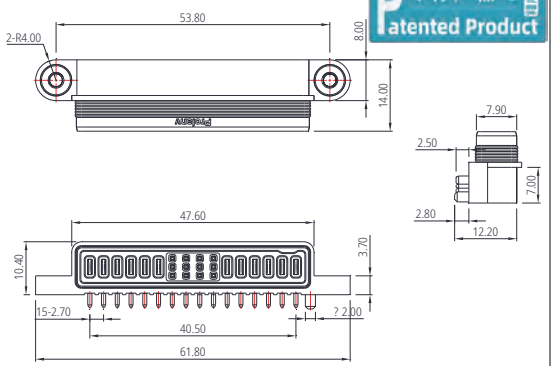

专利产品 Patented Product


EN20A刀片大电流母座 blade Power Male 12PW+12S. R/A DIP折弯插板式

PDC6610C0001



电压Voltage rating	125VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~125°c.
防水等级 Waterproof level	≧IPX6 in the mated

Compatible P/N:
PDC6510C0001

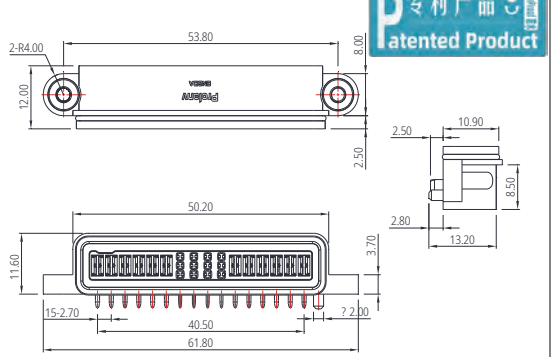

专利产品 Patented Product

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

首页 Home


EN20A刀片大电流公座 blade Power Male 12PW. R/A DIP折弯插板式

PDC6710C0001



电压Voltage rating	125VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~125°c.
防水等级 Waterproof level	≧IPX6 in the mated

Compatible P/N:
PDC6810C0001

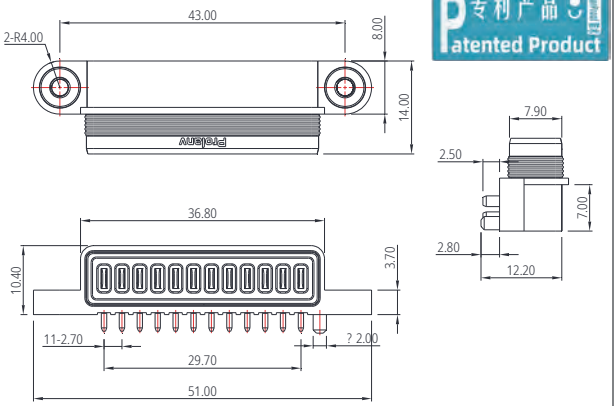

专利产品 Patented Product


EN20A刀片大电流母座 blade Power Male 12PW. R/A DIP折弯插板式

PDC6810C0001



电压Voltage rating	125VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~125°c.
防水等级 Waterproof level	≧IPX6 in the mated

Compatible P/N:
PDC6710C0001

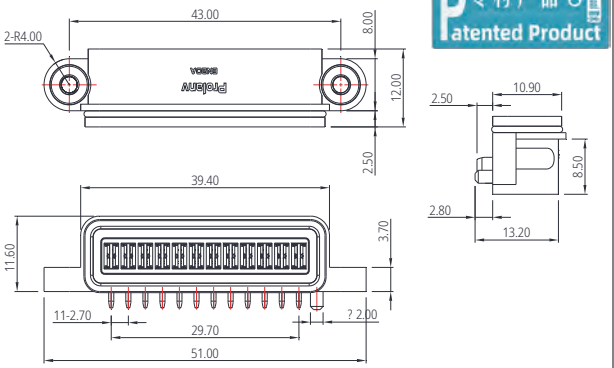

专利产品 Patented Product


EN20A刀片大电流公座 blade Power Male 14PW. R/A DIP折弯插板式

PDC6910C0001



电压Voltage rating	125VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~125°c.
防水等级 Waterproof level	≧IPX6 in the mated

Compatible P/N:
PDC7010C0001

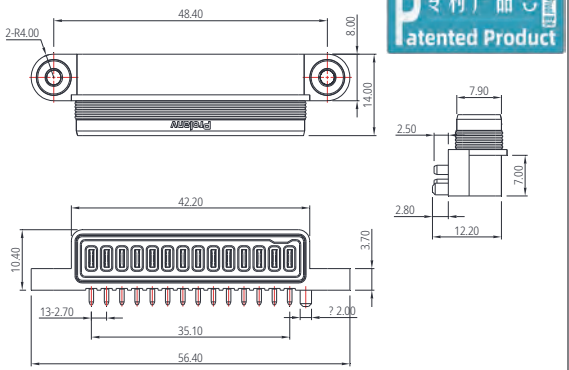

专利产品 Patented Product


EN20A刀片大电流母座 blade Power Male 14PW. R/A DIP折弯插板式

PDC7010C0001



电压Voltage rating	125VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~125°c.
防水等级 Waterproof level	≧IPX6 in the mated

Compatible P/N:
PDC6910C0001

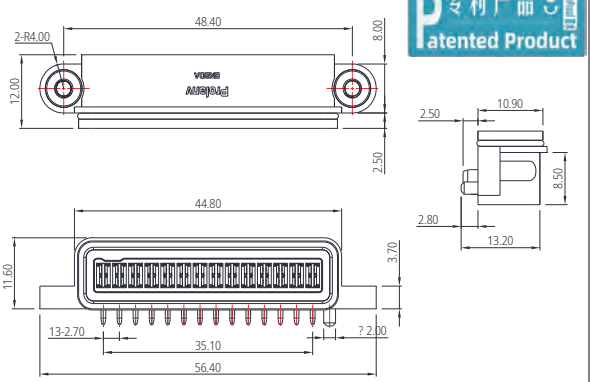

专利产品 Patented Product

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

首页 Home

EN20A刀片大电流公座 blade Power Male 16PW. R/A DIP折弯插板式


专利产品 Patented Product

PDC7110C0001



电压Voltage rating	125VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~125°c.
防水等级 Waterproof level	≧IPX6 in the mated


Compatible P/N:
PDC7210C0001

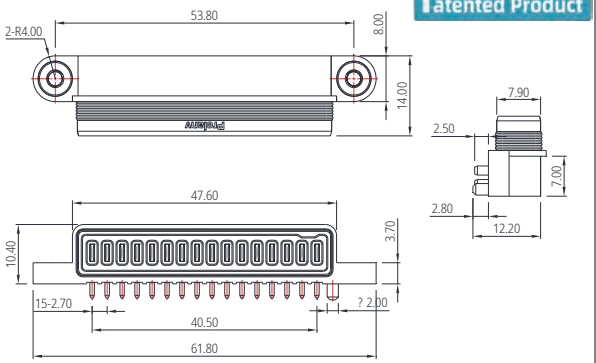

EN20A刀片大电流母座 blade Power Male 16PW. R/A DIP折弯插板式


专利产品 Patented Product

PDC7210C0001



电压Voltage rating	125VDC/max
电流Current rating	20A /Per Pin
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	3,000 cycles.
工作温度Temperature range	-40°c~125°c.
防水等级 Waterproof level	≧IPX6 in the mated

Compatible P/N:
PDC7110C0001

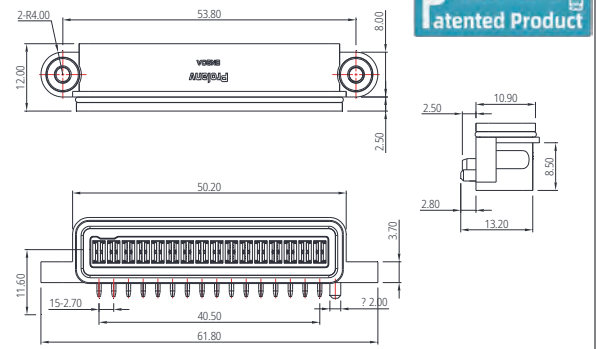


Magnetic Spring-loaded 磁吸式簧式连接器 R/A DIP折弯插板式

PGC701JB00R1



电压Voltage rating	60VDC/max
电流Current rating	3A /Per Pin
接触电阻Contact resistance	10mΩ max.
耐久Durability life	5,000 cycles.
工作温度Temperature range	-35°c~105°c.
应用领域 Application Field	Drone/Robot/IE...

Compatible P/N:
PGF701JB00V1

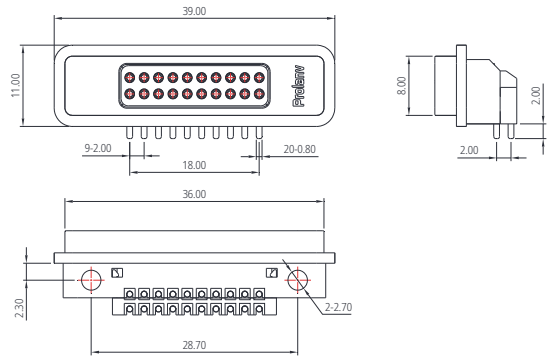


Magnetic Female header 磁吸式针式连接器 Straight DIP直立插板式

PGF701JB00V1



电压Voltage rating	60VDC/max
电流Current rating	3A /Per Pin
接触电阻Contact resistance	10mΩ max.
耐久Durability life	5,000 cycles.
工作温度Temperature range	-35°c~105°c.
应用领域 Application Field	Drone/Robot/IE...

Compatible P/N:
PGC701JB00R1

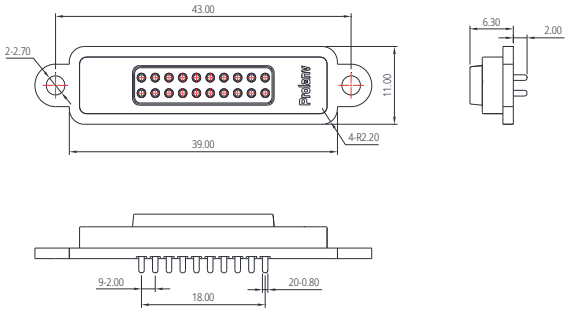

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

首页 Home

EN60A刀片大电流公座 blade Power 4PW+6S. R/A DIP折弯插板式


Patented product 专利产品

PDC0110F0002



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC0210/20F

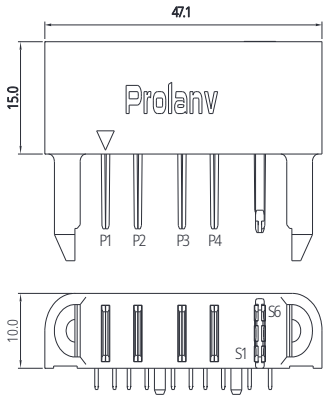

EN60A刀片大电流公座 blade Power 4PW+6S. Straight DIP直立插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC0120F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC0210/20F

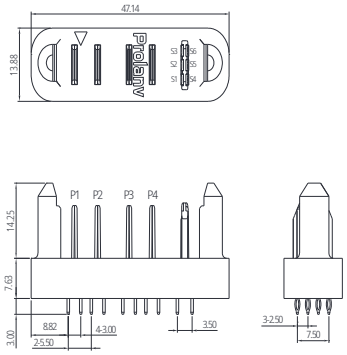

EN60A刀片大电流母座 blade Power 4PW+6S. Straight DIP直立插板式


Patented product 专利产品

PDC0210F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC0110/20F

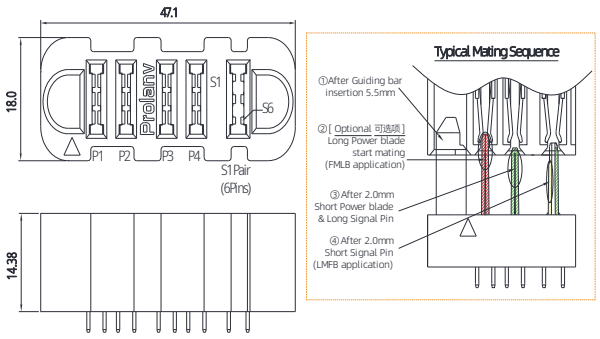

EN60A刀片大电流母座 blade Power 4PW+6S. R/A DIP折弯插板式

* See Page 10 for FMLB or LMFB Application


专利产品 Patented Product

PDC0220F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC0110/20F

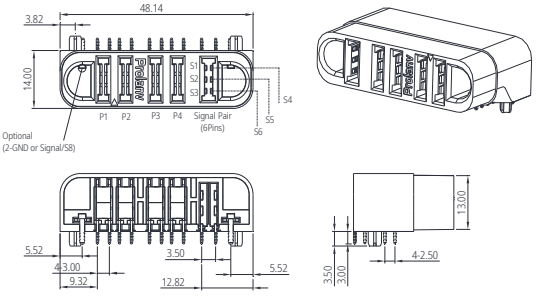

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

首页 Home

EN60A刀片大电流母座 blade Power 2PW/12+2S. R/A DIP折弯插板式

* See Page 10 for FMLB or LMFB Application


专利产品 Patented Product

PDC2420F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other


Compatible P/N:
PDC2310F0003

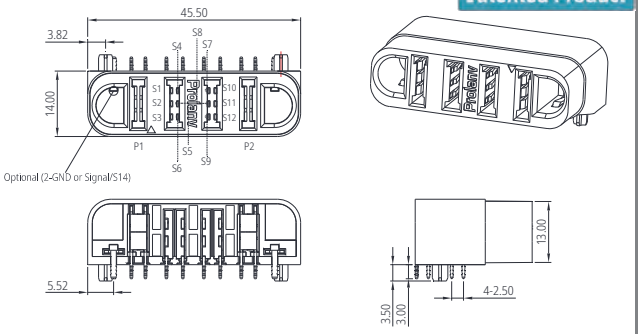

EN60A刀片大电流公座 blade Power 4PW+6S. R/A DIP折弯插板式


Patented product 专利产品

PDC0110F0003



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC0210/20F

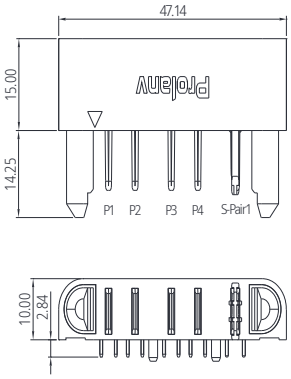

EN60A刀片大电流公座 blade Power 4PW+6S. Straight DIP直立插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC0120F0002



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC0210/20F

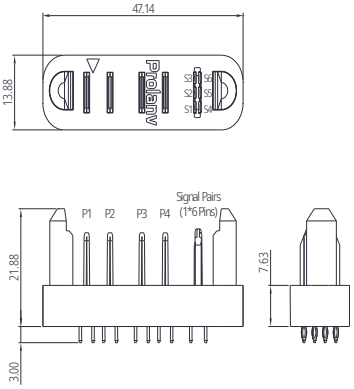

EN60A刀片大电流公座 blade Power 4PW+6S. Straight DIP直立插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC0120F0003



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC0210/20F

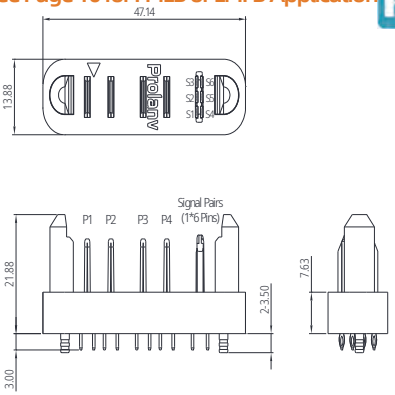

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device


首页 Home

EN60A刀片大电流母座 blade Power 6PW/12+2S. R/A DIP 折弯插板式

* See Page 10 for FMLB or LMFB Application


Patented Product 专利产品

PDC1820F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC1710/20F

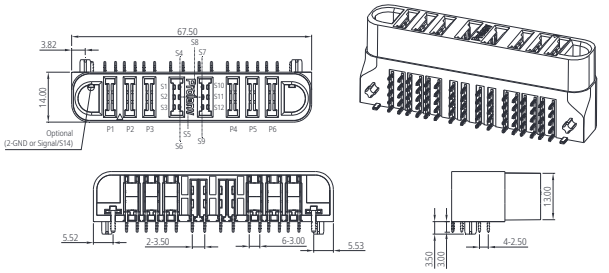


EN60A刀片大电流公座 blade Power 6PW+12S. Straight DIP直立插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC1720F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC1810/20F

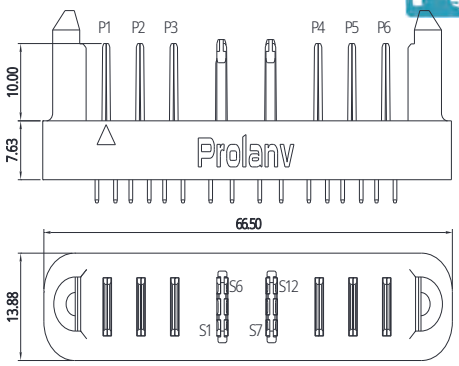

EN60A刀片大电流母座 blade Power 6PW+12S. Straight DIP直立插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC1810F0002



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC1710/20F

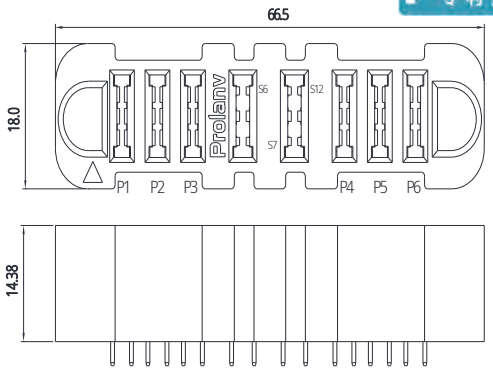


EN60A刀片大电流公座 blade Power 6PW+12S. R/A DIP折弯插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC1710F0003



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC1810/20F

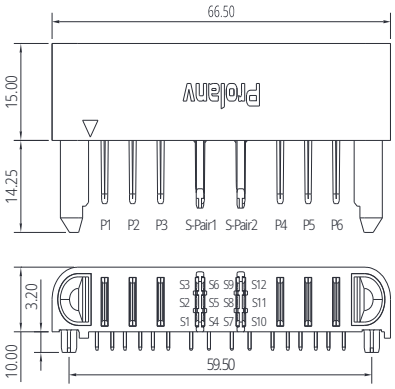

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

首页 Home

EN60A刀片大电流公座 blade Power 6PW+12S. Straight DIP直立插板式

PDC1720F0002




电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC1810F0002


*See Page 10 for FMLB or LMFB Application

Patented product 专利产品

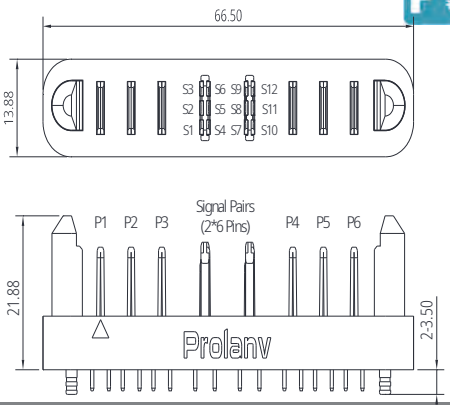

EN60A刀片大电流公座 blade Power 6PW+12S. Straight DIP直立插板式

PDC1720F0003




电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC1810F0002

*See Page 10 for FMLB or LMFB Application

Patented product 专利产品

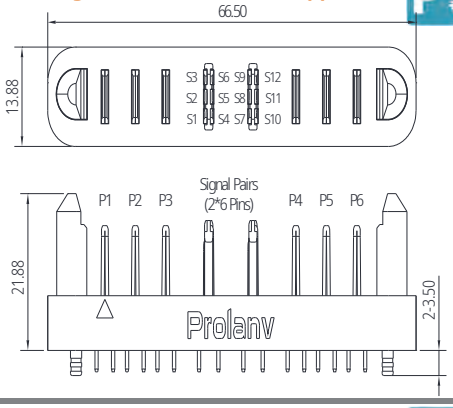

EN60A刀片大电流公座 blade Power 8PW+6S. Straight DIP直立插板式

PDC1920F0001




电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2010F0001

*See Page 10 for FMLB or LMFB Application

Patented product 专利产品

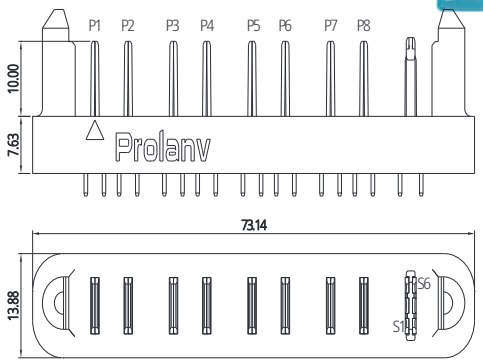

EN60A刀片大电流母座 blade Power 8PW+6S. Straight DIP直立插板式

PDC2010F0001




电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC1920F

*See Page 10 for FMLB or LMFB Application

Patented product 专利产品

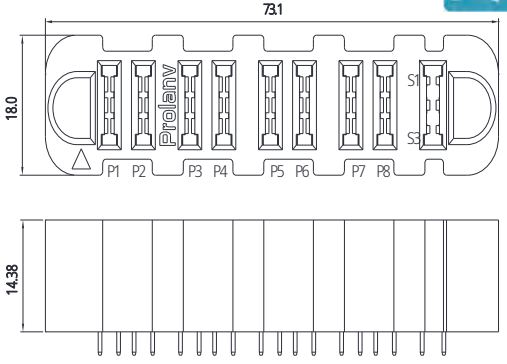

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device


首页 Home

EN60A刀片大电流母座 blade Power 2PW+12S. R/A DIP折弯插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC2310F0003



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2420F0001

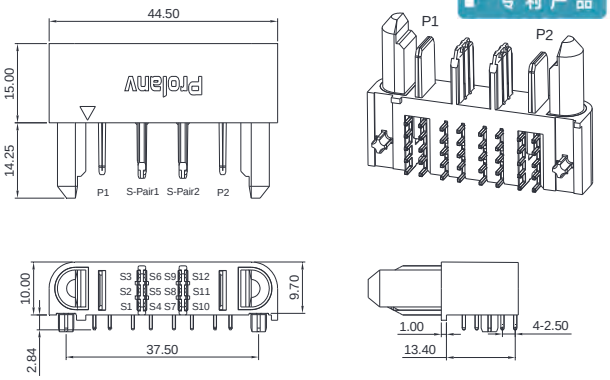


EN60A刀片大电流公座 blade Power 8PW+6S. Straight DIP直立插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC1920F0002



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2010F0001

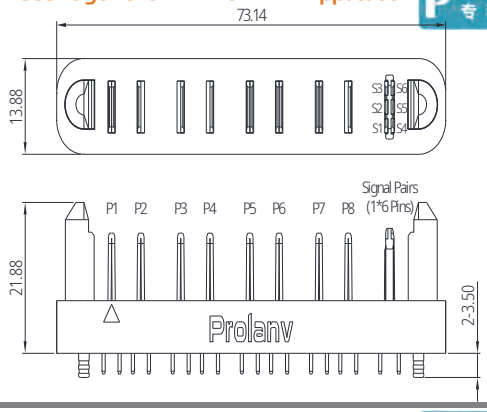

EN60A刀片大电流公座 blade Power 8PW+6S. Straight DIP直立插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC1920F0003



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2010F0001

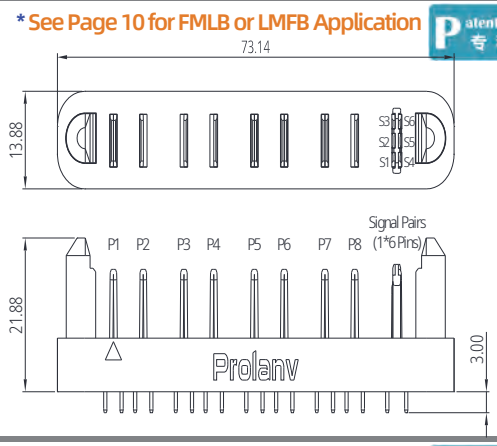

EN60A刀片大电流母座 blade Power 10PW+12S. Straight DIP直立插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC2210F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC21F**

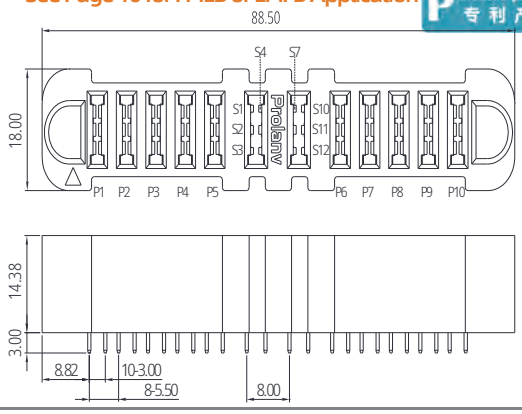

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device


首页 Home

EN60A刀片大电流公座 blade Power 10PW+12S. Straight DIP 直立插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC2110F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2210/20F

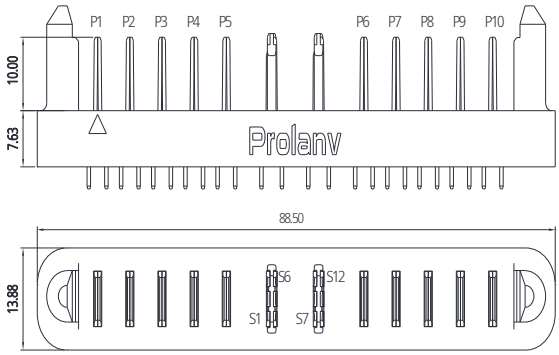


EN60A刀片大电流公座 blade Power 10PW+12S. Straight DIP 直立插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC2120F0002



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2210/20F

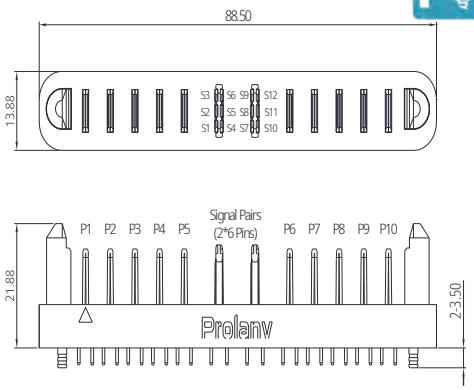


EN60A刀片大电流公座 blade Power 10PW+12S. Straight DIP 直立插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC2120F0003



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2210/20F

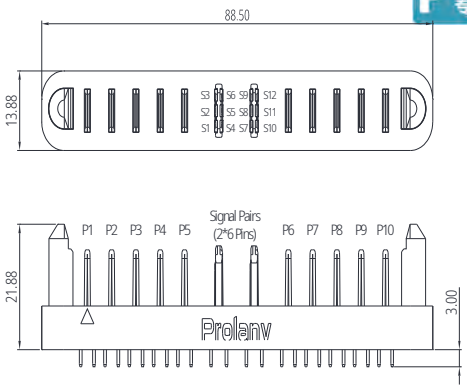


EN60A刀片大电流公座 blade Power 10PW+12S. R/A DIP 折弯插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC2110F0003



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2210/20F

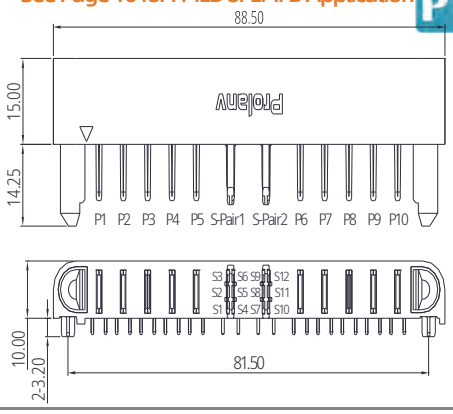

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

首页 Home

EN60A刀片大电流母座 blade Power 10PW/12+2S. R/A DIP 折弯插板式

* See Page 10 for FMLB or LMFB Application


Patented Product 专利产品

PDC2220F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2110/20F

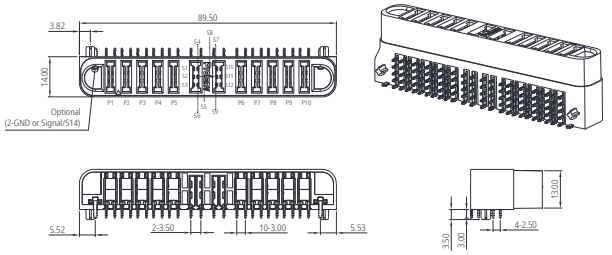

EN60A刀片大电流母座 blade Power 7PW+6S. Straight DIP 直立插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC2610F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2510F0003

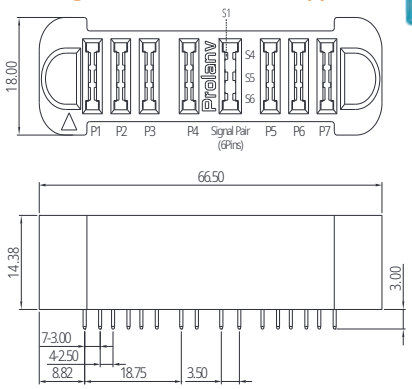


EN60A刀片大电流公座 blade Power 7PW+6S. R/A DIP 折弯插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC2510F0003



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2610F0001

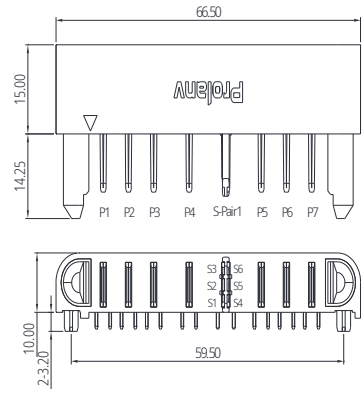

EN60A刀片大电流母座 blade Power 8PW+12S. Straight DIP 直立插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC2810F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2710/20F

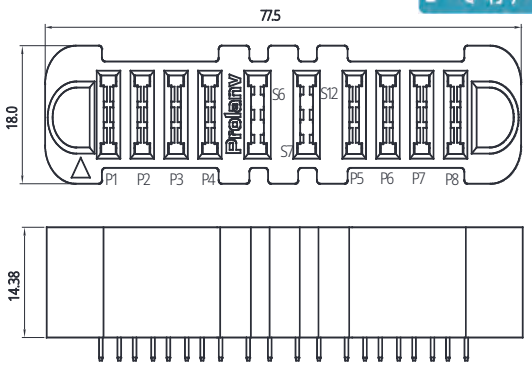

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device


首页 Home

EN60A刀片大电流公座 blade Power 8PW+12S. Straight DIP 直立插板式

*See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC2710F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2810/20F

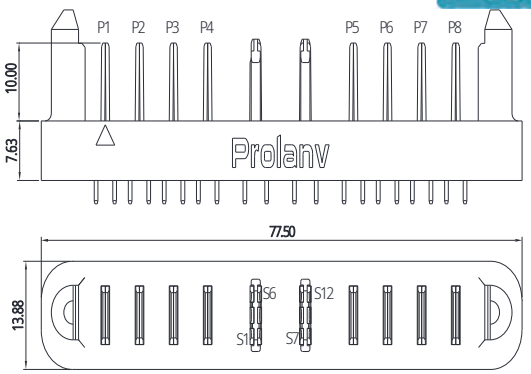


EN60A刀片大电流公座 blade Power 8PW+12S. R/A DIP 折弯插板式

*See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC2710F0003



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2810/20F

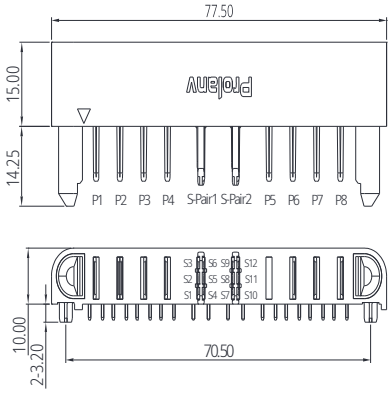


EN60A刀片大电流公座 blade Power 8PW+12S. Straight DIP 直立插板式

*See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC2720F0002



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2810/20F

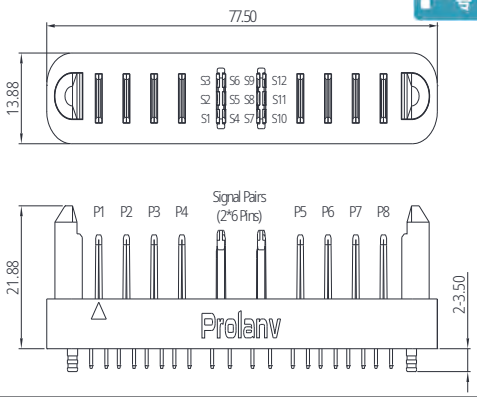

EN60A刀片大电流公座 blade Power 8PW+12S. Straight DIP 直立插板式

*See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC2720F0003



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2810/20F

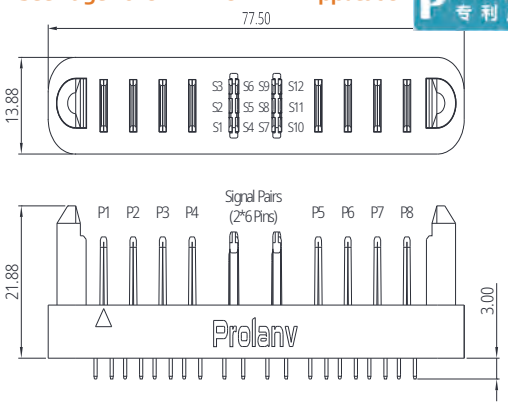

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

首页 Home

EN60A刀片大电流公座 blade Power 12PW. Straight DIP 直立插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC2910F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC3010/20F

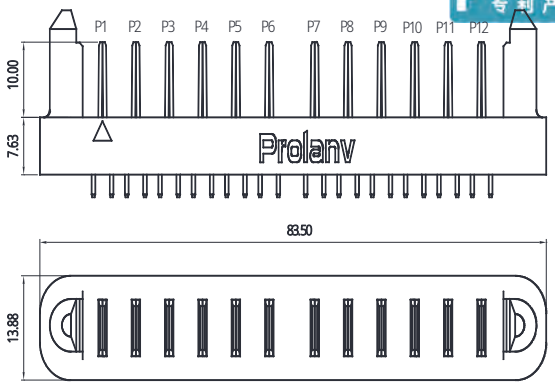

EN60A刀片大电流母座 blade Power 12PW. Straight DIP 直立插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC3010F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2910/20F

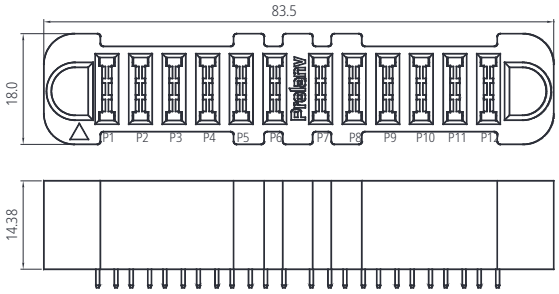

EN60A刀片大电流公座 blade Power 12PW. R/A DIP 折弯插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC2910F0003



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC3010/20F

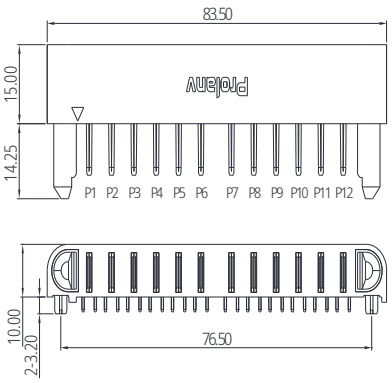

EN60A刀片大电流公座 blade Power 12PW. Straight DIP 直立插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC2920F0002



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC3010/20F

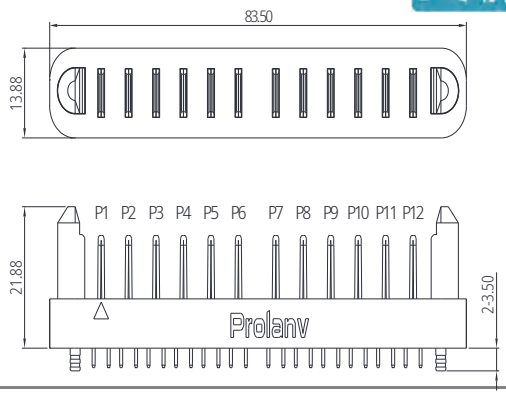

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

首页

EN60A刀片大电流公座 blade Power 12PW. Straight DIP 直立插板式

* See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC2920F0003



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC3010/20F

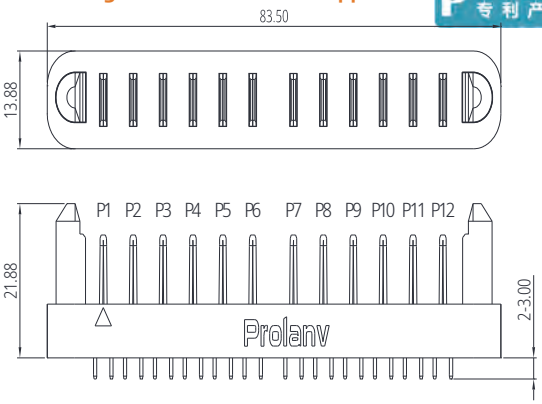


EN60A刀片大电流母座 blade Power 12PW/2S. R/A DIP 折弯插板式

* See Page 10 for FMLB or LMFB Application


专利产品 Patented Product

PDC3020F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2910/20F

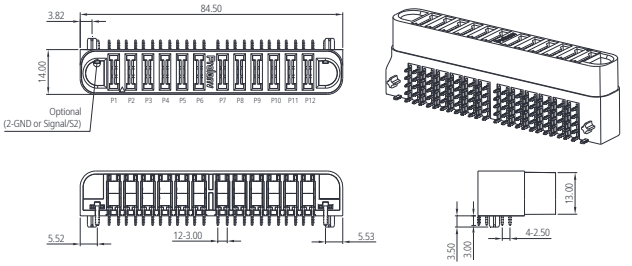

EN60A刀片大电流母座 blade Power 8PW/12+2S. R/A DIP 折弯插板式

* See Page 10 for FMLB or LMFB Application


专利产品 Patented Product

PDC2820F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC2710/20F

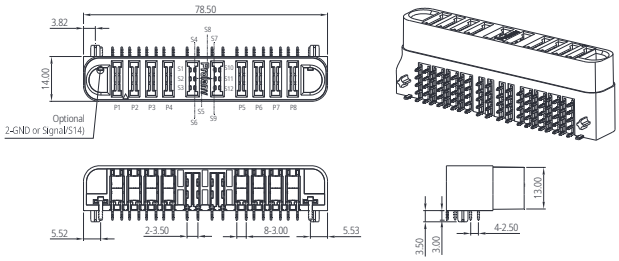

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device


首页

EN60A刀片大电流公座 blade Power 4PW+12. Straight DIP 直立插板式

*See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC0520F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC0610F0001

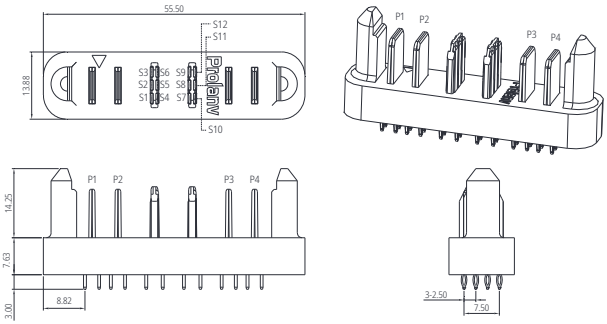

EN60A刀片大电流母座 blade Power 4PW+12. Straight DIP 直立插板式

*See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC0610F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC05**

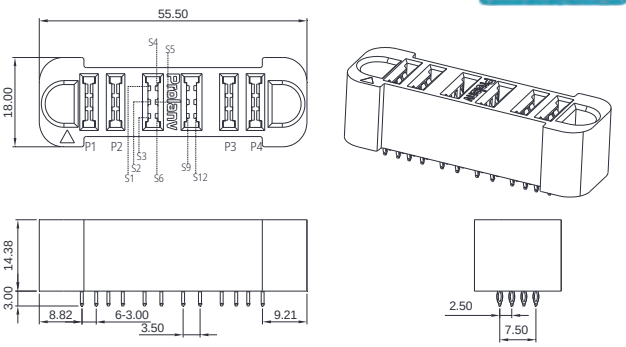

EN60A刀片大电流公座 blade Power 4PW+12S. Straight DIP 直立插板式

*See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC0520F0002



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC0610F0001

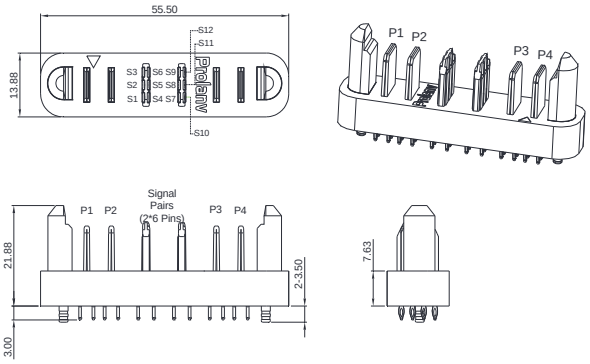

EN60A刀片大电流公座 blade Power 4PW+12S. Straight DIP 直立插板式

*See Page 10 for FMLB or LMFB Application


Patented product 专利产品

PDC0520F0003



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC0610F0001

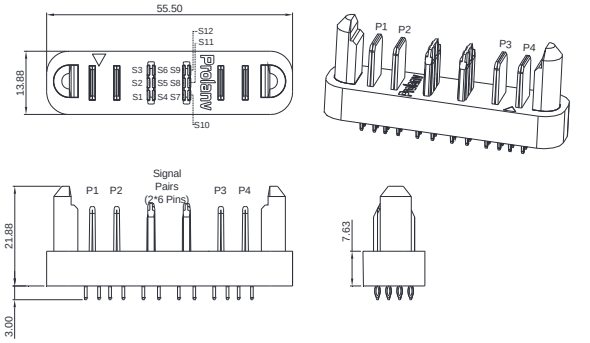

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device


首页

EN60A刀片大电流公座 blade Power 4PW+12S. R/A DIP 折弯插板式

* See Page 10 for FMLB or LMFB Application


专利产品 Patented Product

PDC7312F3403



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC7410/20F

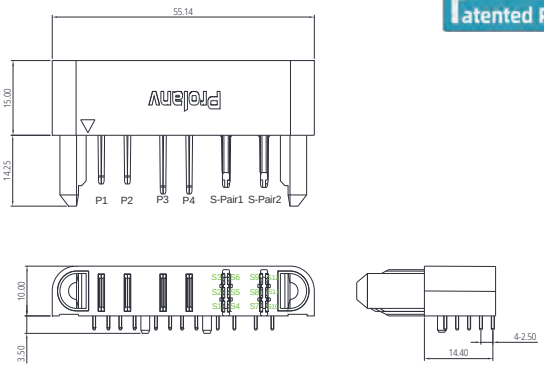


EN60A刀片大电流公座 blade Power 4PW+12S. Straight DIP 直立插板式

* See Page 10 for FMLB or LMFB Application


专利产品 Patented Product

PDC7322F3402



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC7410/20F

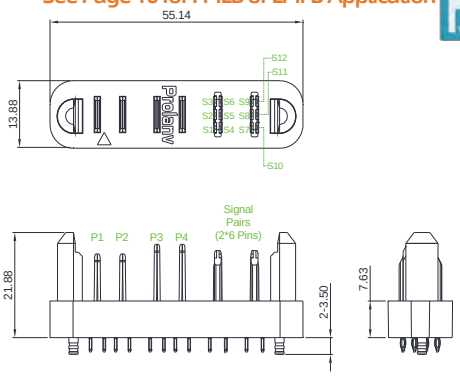

EN60A刀片大电流母座 blade Power 4PW/12+2S. R/A DIP 折弯插板式

* See Page 10 for FMLB or LMFB Application


专利产品 Patented Product

PDC7420F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC7310/20F

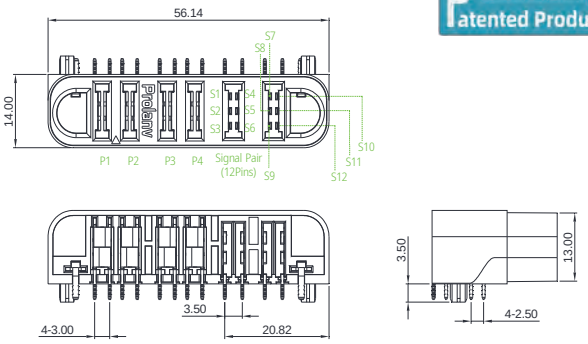

EN60A刀片大电流母座 blade Power 4PW+12S. Straight DIP 直立插板式

* See Page 10 for FMLB or LMFB Application


专利产品 Patented Product

PDC7410F0001



电压Voltage rating	250VDC/max
电流Current rating	60A/per power pair
接触电阻Contact resistance	0.6mΩ max.
耐久Durability life	10,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC7310/20F

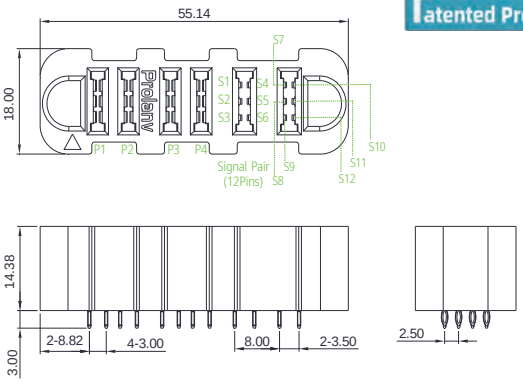

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

首页 Home


EX150刀片大电流母座 blade Power 6PW+12S. Straight DIP 直立插板式

PDC3810F0002



电压Voltage rating	600VDC/max
电流Current rating	150A/per power pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC3730F0001

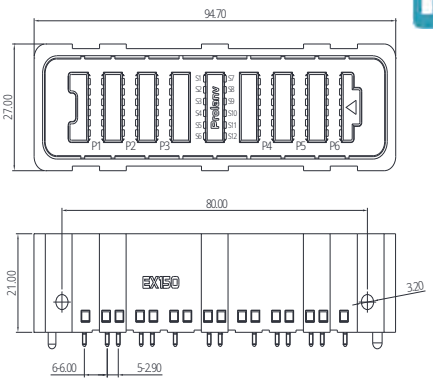


EX150刀片大电流公座 blade Power 4PW+24S. Straight DIP 直立插板式

PDC3320F0001



电压Voltage rating	600VDC/max
电流Current rating	150A/per power pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC3410F0001

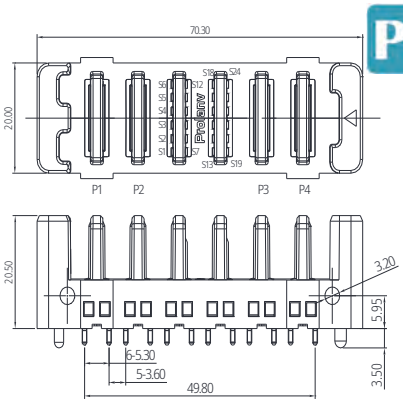


EX150刀片大电流母座 blade Power 6PW+24S. Straight DIP 直立插板式

PDC3810F0001



电压Voltage rating	600VDC/max
电流Current rating	150A/per power pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC3720F0001

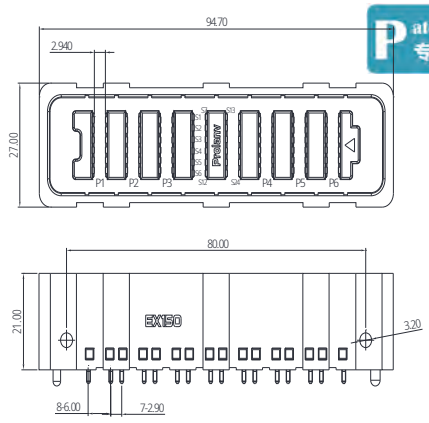


EX150刀片大电流公座 blade Power 6PW+12S. Straight DIP 直立插板式

PDC3730F0001



电压Voltage rating	600VDC/max
电流Current rating	150A/per power pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC3810F0002

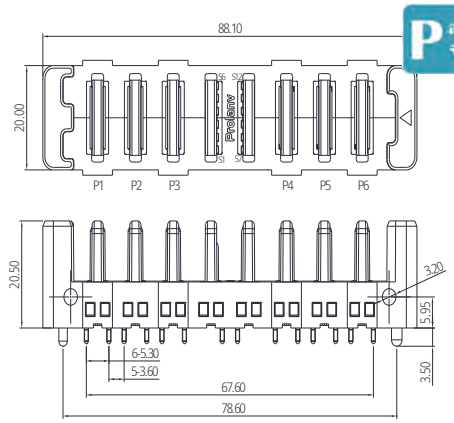

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

首页 Home


EX150刀片大电流母座 blade Power 4PW+12S. Straight DIP 直立插板式

PDC3410F0002



电压Voltage rating	600VDC/max
电流Current rating	150A/per power pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC3330F0001

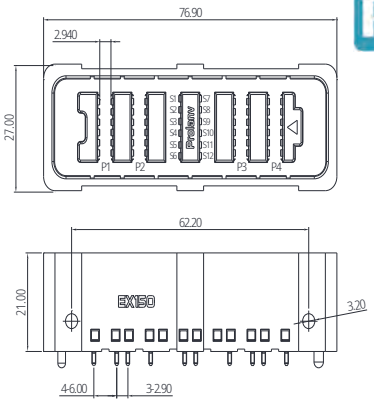


EX150刀片大电流公座 blade Power 6PW+24S. Straight DIP 直立插板式

PDC3720F0001



电压Voltage rating	600VDC/max
电流Current rating	150A/per power pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC3320F0001

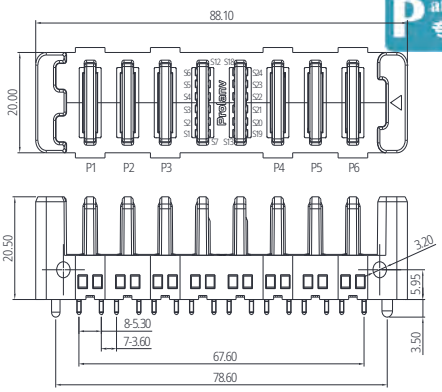


EX150刀片大电流母座 blade Power 4PW+24S. Straight DIP 直立插板式

PDC3410F0001



电压Voltage rating	600VDC/max
电流Current rating	150A/per power pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC3320F0001

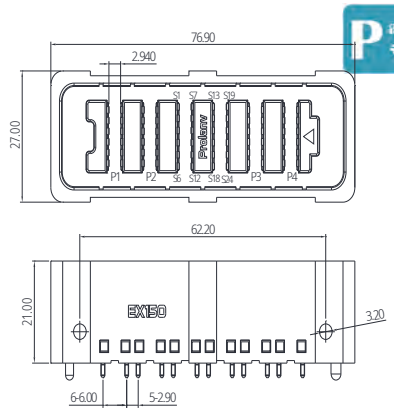


EX150刀片大电流公座 blade Power 4PW+12S. Straight DIP 直立插板式

PDC3330F0001



电压Voltage rating	600VDC/max
电流Current rating	150A/per power pair
接触电阻Contact resistance	0.5mΩ max.
耐久Durability life	5,000 cycles max.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/Robot/Other

Compatible P/N:
PDC3410F0002

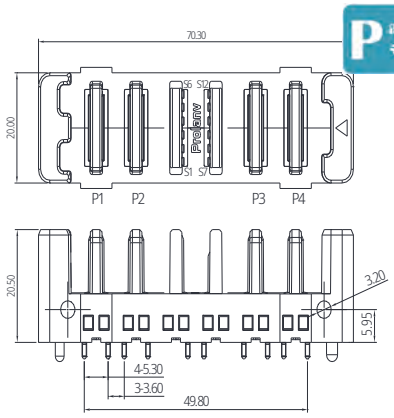

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

首页 Home


AW40机臂快拆电连接器模块.机身母端 quick fit arm connector module

PAW1110C0001



Compatible P/N:
PAW1210C0001

电压Voltage rating	250VDC/max
电流Current rating	35A max./Per pin
接触电阻Contact resistance	1.2mΩ max.
耐久Durability life	5,000 cycles.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/IE device...

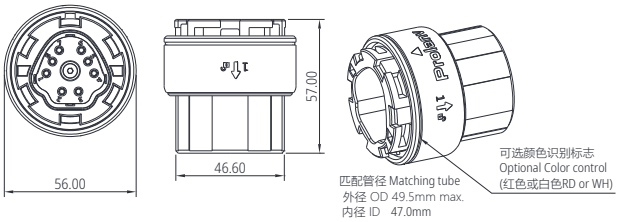


AW40机臂快拆电连接器模块.机臂公端 quick fit arm connector module

PAW1210C0001



Compatible P/N:
PAW1110C0001

电压Voltage rating	250VDC/max
电流Current rating	35A max./Per pin
接触电阻Contact resistance	1.2mΩ max.
耐久Durability life	5,000 cycles.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/IE device...

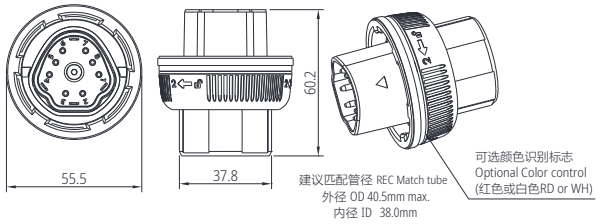


AW40机臂快拆电连接器模块.机身母端quick fit arm connector module

PAW0910C0002




Compatible P/N:
PAW1010C0002

电压Voltage rating	250VDC/max
电流Current rating	15A max./Per pin
接触电阻Contact resistance	1.2mΩ max.
耐久Durability life	5,000 cycles.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/IE device...

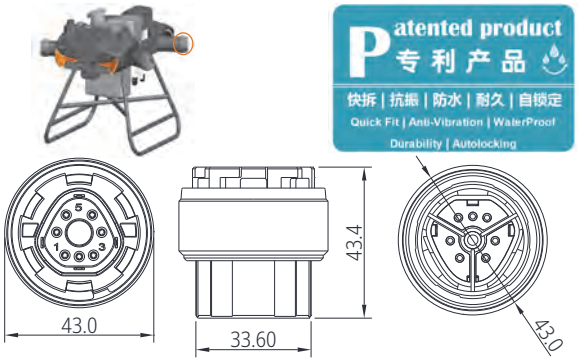


AW40机臂快拆电连接器模块.机臂公端 quick fit arm connector mod-

PAW1010C0002



Compatible P/N:
PAW0910C0002

电压Voltage rating	250VDC/max
电流Current rating	15A max./Per pin
接触电阻Contact resistance	1.2mΩ max.
耐久Durability life	5,000 cycles.
工作温度Temperature range	-40°c~125°c.
应用领域 Application Field	Drone/IE device...

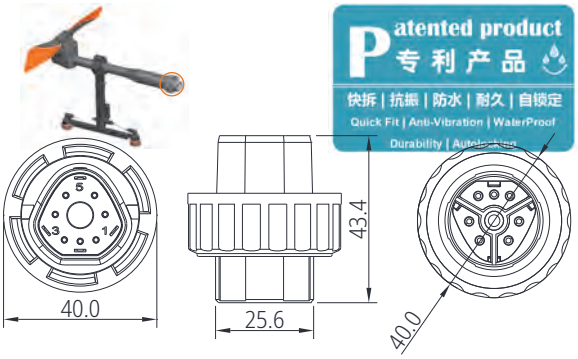

Units: [mm]

应用于 无人机/机器人/电动汽车/工业设备 | Flexible Application: Drone/Robot/Motor/IE Device

首页 Home


AT80针式大电流连接器 | AT80 Needle Hi-current Power connector wire-harness

PAT02X0BT001



Compatible P/N:
PAT0110BT001

电压Voltage rating	200VDC/max
电流Current rating	80A/Per Pin.
接触电阻Contact resistance	0.8mΩ max.
耐久Durability life	2,000 cycles.
工作温度Temperature range	-25°c~125°c.
应用领域 Application Field	Drone/Robot/IE device...

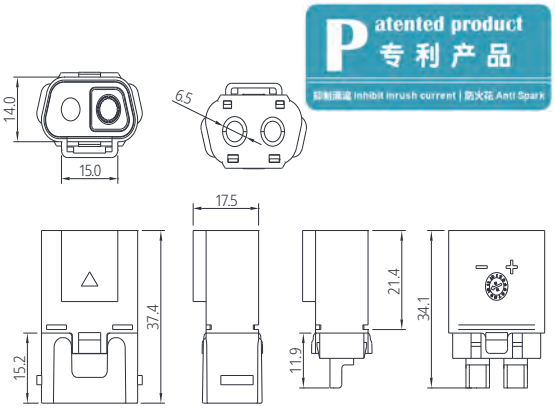


AT80针式大电流连接器 | AT80 Needle Hi-current Power connector wire-harness

PAT0110BT001



Compatible P/N:
PAT02X0BT001

电压Voltage rating	200VDC/max
电流Current rating	80A/Per Pin.
接触电阻Contact resistance	0.8mΩ max.
耐久Durability life	2,000 cycles.
工作温度Temperature range	-25°c~125°c.
应用领域 Application Field	Drone/Robot/IE device...

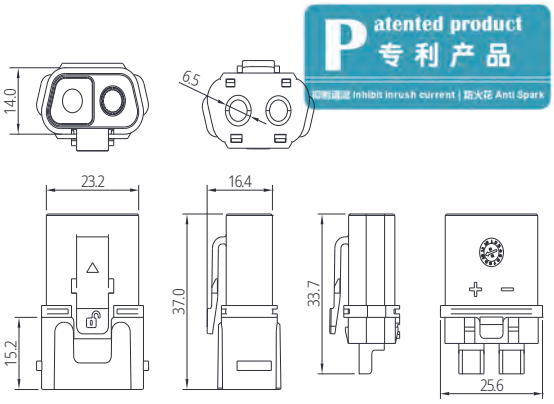

Units: [mm]